

PRO

Simple and flexible solution to design modern light lines in professional and retail spaces

LED RECESSED LINEAR LUMINAIRE SERIES

PRODUCT INFORMATION

- Modern looking, neat luminaire offering comfortable, good quality lighting and can also work as a design element.
- Ideal lighting in the non-working areas of professional spaces such as offices, educational institutes, and also the welcoming areas and entrances of retail spaces.
- ILLUS LED RECESSED LINEAR Luminaire gives the customer the flexibility to choose between 9 models based on their specific need with lumen package from 1700 lm to 3600 lm.

BENEFITS

- Clean and uniform light.
- Multiple application use.
- Easy to install and maintain.

FEATURES

- High CRI>80.
- Efficacy up to 93lm/w.
- Life span 30,000 hrs.
- Operating voltage AC220 240V.
- Non dimmable.



AREAS OF APPLICATION





Hospitality

Shopping Center





Commercial

Educational Center



I TECHNICAL OPERATING & ELECTRICAL DATA

Body Color	Matt White
Body Material	Aluminum
IP Rating	IP20
Lumen	1700-3600lm/M+/-10%
Voltage	AC220-240V
Frequency	50/60Hz
Mounting Type	Recessed
Beam Angle	115°
Dimming	Non- Dimmable
Lamp Type	Indirect
Type of Frame	Fixed
Life Span	30000hrs


SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	CCT
671059	ILS20RLL830WW02	20W	1700lm	85lm/w	3000K
671060	ILS20RLL840NW02	20W	1800lm	90lm/w	4000K
671061	ILS20RLL850DL02	20W	1850lm	92.5lm/w	5000K
671062	ILS30RLL830WW01	30W	2500lm	83.33lm/w	3000K
671063	ILS30RLL840NW01	30W	2700lm	90lm/w	4000K
671064	ILS30RLL850DL01	30W	2750lm	91.67lm/w	5000K
671065	ILS40RLL830WW02	40W	3300lm	82.5lm/w	3000K
671066	ILS40RLL840NW02	40W	3500lm	87.5lm/w	4000K
671067	ILS40RLL850DL02	40W	3600lm	90lm/w	5000K


DIMENSIONS




671059 - 671060 - 671061



671062 - 671063 - 671064



APPLICATION PICTURE

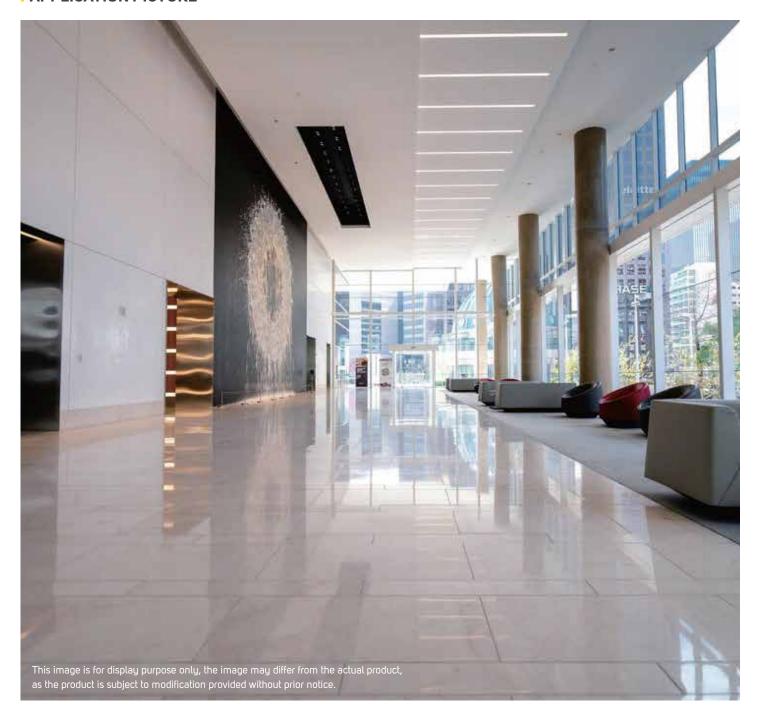

LED RECESSED LINEAR LUMINAIRE SERIES

BEYOND LIGHT..
TO THE LAST DETAILS!

