

Simple and flexible solution to design modern light lines in professional and retail spaces

LED RECESSED LINEAR LUMINAIRE SERIES (CORNER)

PRODUCT INFORMATION

- Modern looking, neat luminaire offering comfortable, good quality lighting and can also work as a design element.
- Ideal lighting in the non-working areas of professional spaces such as offices, educational institutes, and also the welcoming areas and entrances of retail spaces.
- ILLUS LED RECESSED LINEAR Luminaire (CORNER) gives the customer the flexibility to choose between 9 models based on their specific need with lumen package from 2110 lm to 4600 lm.

BENEFITS

- Clean and uniform light.
- Multiple application use.
- Easy to install and maintain.

FEATURES

- High CRI>80.
- Efficacy up to 116lm/w.
- Life span 30,000 hrs.
- Operating voltage AC220 240V.
- Non dimmable.



AREAS OF APPLICATION





Hospitality

Shopping Center





Commercial

Educational Center




I TECHNICAL OPERATING & ELECTRICAL DATA

Body Color	Matt White
Body Material	Aluminum
IP Rating	IP20
Lumen	2110-4600lm/M+/-10%
Voltage	AC220-240V
Frequency	50/60Hz
Mounting Type	Recessed
Beam Angle	110°
Dimming	Non Dimmable
Lamp Type	Indirect
Fixed or Adjustable	Fixed
Life Span	30000hrs

SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	CCT
671104	ILS20RLLX830WW01	20W	2110lm	105.5lm/w	3000K
671105	ILS20RLLX840NW01	20W	2200lm	110lm/w	4000K
671106	ILS20RLLX850DL01	20W	2280lm	114lm/w	5000K

I DIMENSIONS

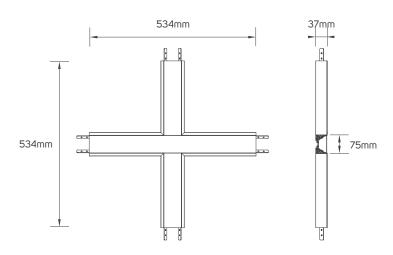


671104 - 671105 - 671106

ACCESSORIES

Code No.	Model No.	Body Color	Body Material
671113	ILSRLLC01	chrome	iron
671116	ILSRLLFD01	white	flexible PC

ACCESSORIES DIMENSIONS




671116 - Diffuser 671113 - Connector

SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	CCT
671107	ILS30RLLX830WW01	30W	3300lm	110lm/w	3000K
671108	ILS30RLLX840NW01	30W	3400lm	113.33lm/w	4000K
671109	ILS30RLLX850DL01	30W	3480lm	116lm/w	5000K

I DIMENSIONS

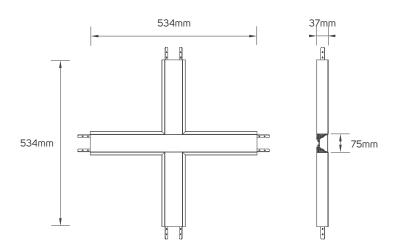



671107 - 671108 - 671109

ACCESSORIES

Code No.	Model No.	Body Color	Body Material
671114	ILSRLLC02	chrome	iron
671117	ILSRLLFD02	white	flexible PC

ACCESSORIES DIMENSIONS






671117 - Diffuser 671114 - Connector

SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	CCT
671110	ILS40RLLX830WW01	40W	4200lm	105lm/w	3000K
671111	ILS40RLLX840NW01	40W	4500lm	112.5lm/w	4000K
671112	ILS40RLLX850DL01	40W	4600lm	115lm/w	5000K

I DIMENSIONS

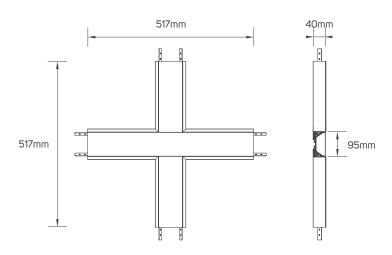

671110 - 671111 - 671112

ACCESSORIES


Code No.	Model No.	Body Color	Body Material
671115	ILSRLLC03	chrome	iron
671118	ILSRLLFD03	white	flexible PC


ACCESSORIES DIMENSIONS



671118 - Diffuser 671115 - Connector

APPLICATION PICTURE



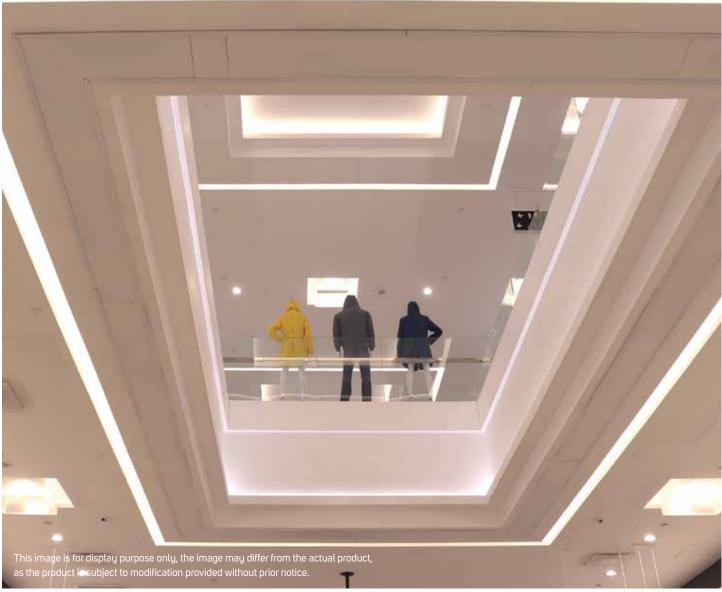

LED RECESSED LINEAR LUMINAIRE SERIES (CORNER)

BEYOND LIGHT..
TO THE LAST DETAILS!

