



Innovative LED flood track luminaires have never been so simple

## LED FLOOD TRACK LUMINAIRE SERIES

### PRODUCT INFORMATION

- Designed for simplicity. It comes in a choice of lengths, flux packages and beam shapes to suit every project and application.
- Easy to assemble and install for faster retrofits and refurbishments.
- ILLUS LED FLOOD TRACK Luminaire gives the customer the flexibility to choose between 6 models based on their specific need with lumen package from 850 lm to 2500 lm.

### BENEFITS

- Optimized, efficient design and light effect.
- Improved light continuity.
- Ideal for use in retail and industry applications.

### FEATURES

- High CRI>95.
- Efficacy up to 76 lm/w.
- Long life span 30,000 hrs.
- Operating voltage AC220 – 240V.
- Non – dimmable.



**BEYOND LIGHT..  
TO THE LAST DETAILS!**

## AREAS OF APPLICATION



Commercial



Shopping Center



Educational center




## TECHNICAL OPERATING & ELECTRICAL DATA

IP Rating	IP20
Voltage	AC220-240V
Frequency	50/60Hz
Lifespan	30000Hrs
Dimming	Non-Dimmable
CRI	95
Beam Angle	90°

## SPECIFICATIONS


Code No.	Item Model No.	Body Color	Body Material	Rated Power	CCT	Lumen	Efficacy
614383	ILS12FTRKL930WW01	Black	Aluminum	12W	3000K	850lm	70.83lm/w
614384	ILS12FTRKL940NW01	Black	Aluminum	12W	4000K	900lm	75lm/w
614385	ILS26FTRKL930WW01	Black	Aluminum	26W	3000K	1800lm	69.23lm/w
614386	ILS26FTRKL940NW01	Black	Aluminum	26W	4000K	1920lm	73.85lm/w
614387	ILS33FTRKL930WW01	Black	Aluminum	33W	3000K	2350lm	71.21lm/w
614388	ILS33FTRKL940NW01	Black	Aluminum	33W	4000K	2500lm	75.76lmw

## DIMENSIONS

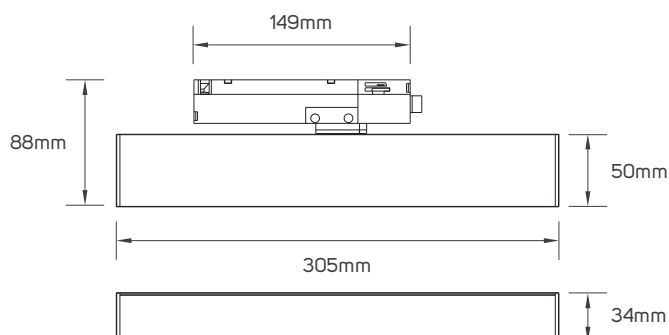


614383 - 614384

**DIMENSIONS**

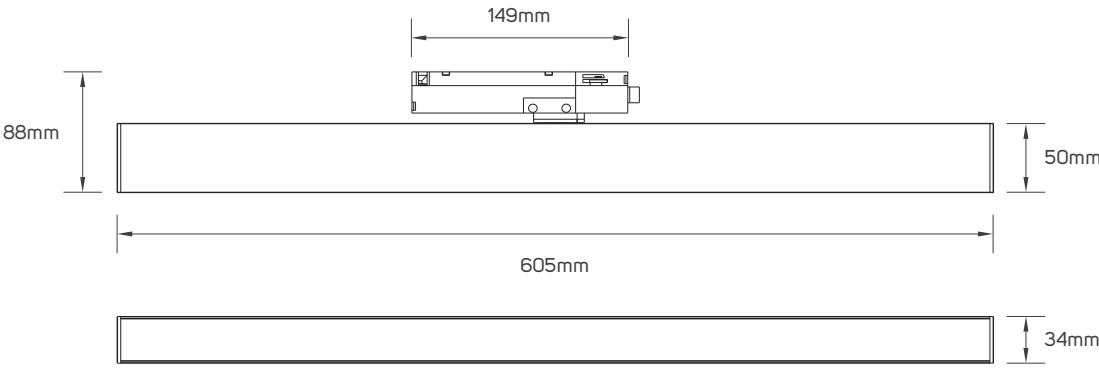

614385 - 614386

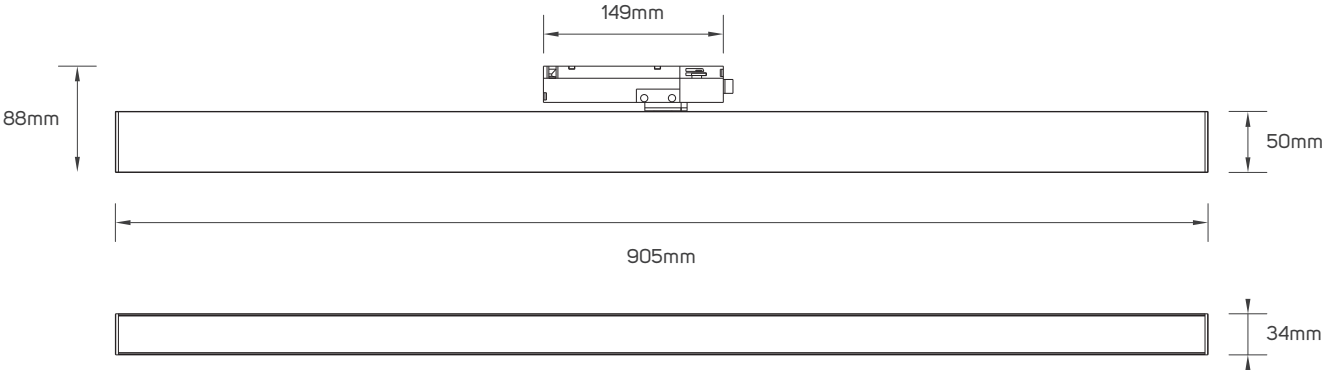

614387 - 614388



This image is for display purpose only, the image may differ from the actual product, as the product is subject to modification provided without prior notice.

## LED FLOOD TRACK LUMINAIRE SERIES

**BEYOND LIGHT..  
TO THE LAST DETAILS!**

