



Suitable Light for General Lighting applications

LED SURFACE-MOUNTED LUMINAIRE SERIES

PRODUCT INFORMATION

- Suitable for a series of lighting applications in office, retail and general area lighting.
- Available in a wide variety of lumen packs, cut out size and color temperature.
- ILLUS LED RECESSED CEILING Luminaire gives the customer the flexibility to choose between 16 models based on their specific need with lumen package from 460lm to 2550lm.

BENEFITS

- Compact design for better integration with the building.
- Comfortable light with high efficiency.
- Reliable performance for indoor applications.

FEATURES

- High CRI>95.
- Long life span 30,000 hrs.
- Operating voltage AC220 – 240V.
- Non – dimmable.

AREAS OF APPLICATION



Hospitality



Public indoor



Shopping Center



Commercial



Workplace



Educational center




TECHNICAL OPERATING & ELECTRICAL DATA

Input Voltage & Frequency	AC220-240V, 50/60Hz
Rated CRI	>95
Beam Angle	24°
Life Span	30,000h
Ingress Protection Rating	IP20
Dimming	Non-Dimmable
Ambient Temperature	45°C
Switching Cycle ON/OFF	100,000
Body Material	Aluminum


SPECIFICATIONS

Code No.	Model No.	Power	CCT	Lumen	Efficacy	Body Color
LI613778	ILS6WSMSL930WW01	6.5W	3000K	460lm	70.77lm/w	White + Black
LI613779	ILS6WSMSL930WW02	6.5W	3000K	460lm	70.77lm/w	Black
LI613780	ILS6WSMSL940NW01	6.5W	4000K	470lm	72.31lm/w	White + Black
LI613781	ILS6WSMSL940NW02	6.5W	4000K	470lm	72.31lm/w	Black
LI613784	ILS12WSMSL930WW01	12W	3000K	900lm	75lm/w	White + Black
LI613785	ILS12WSMSL930WW02	12W	3000K	900lm	75lm/w	Black
LI613786	ILS12WSMSL940NW01	12W	4000K	920lm	76.67lm/w	White + Black
LI613787	ILS12WSMSL940NW02	12W	4000K	920lm	76.67lm/w	Black
LI613790	ILS24WSMSL930WW01	24W	3000K	1680lm	70lm/w	White + Black
LI613791	ILS24WSMSL930WW02	24W	3000K	1680lm	70lm/w	Black
LI613792	ILS24WSMSL940NW01	24W	4000K	1720lm	71.67lm/w	White + Black
LI613793	ILS24WSMSL940NW02	24W	4000K	1720lm	71.67lm/w	Black
LI613796	ILS35WSMSL930WW01	35W	3000K	2500lm	71.43lm/w	White + Black
LI613797	ILS35WSMSL930WW02	35W	3000K	2500lm	71.43lm/w	Black
LI613798	ILS35WSMSL940NW01	35W	4000K	2550lm	72.86lm/w	White + Black
LI613799	ILS35WSMSL940NW02	35W	4000K	2550lm	72.86lm/w	Black


I DIMENSIONS

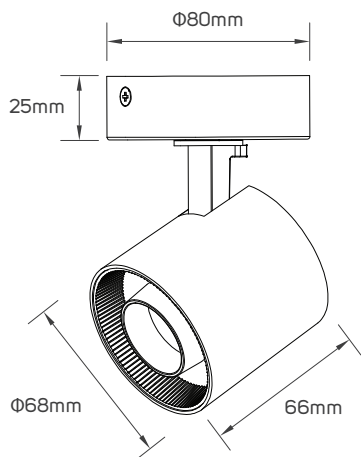


LI613778 - LI613779 - LI613780 - LI613781

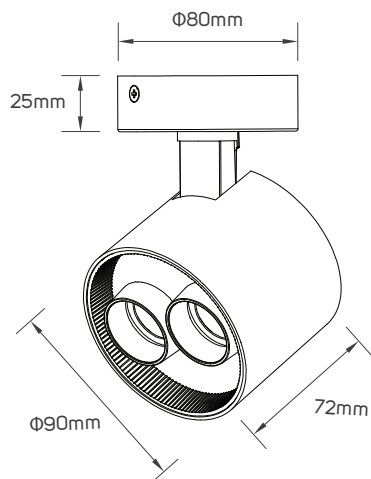

LI613784 - LI613785 - LI613786 - LI613787

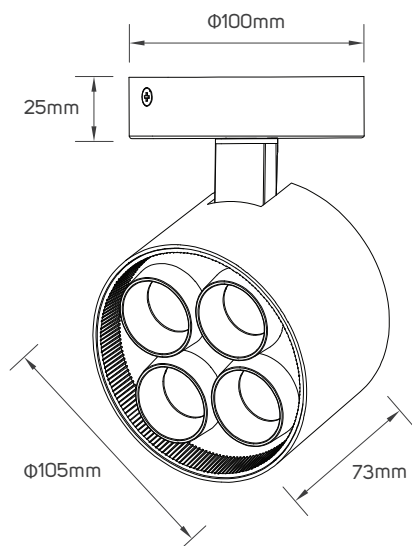

LI613790 - LI613791 - LI613792 - LI613793

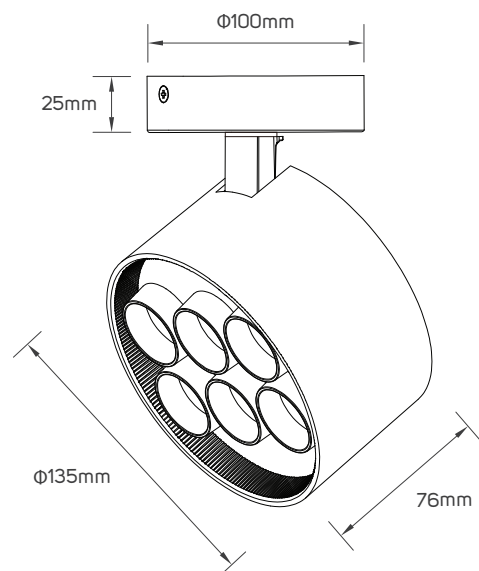

LI613796 - LI613797 - LI613798 - LI613799

APPLICATION PICTURE



This image is for display purpose only, the image may differ from the actual product, as the product is subject to modification provided without prior notice.

LED SURFACE-MOUNTED LUMINAIRE SERIES

**BEYOND LIGHT..
TO THE LAST DETAILS!**



Carrer de la Vall de la Ballestera, 64, 46015 València, Valencia, España, Tel: +34619824456

www.illusillumination.com

illus illumination reserve the right to make dimensional, design and technical alternations without prior notice. illus illumination endeavor to ensure that any advice, recommendation or information it provides in produ literature is accurate and correct. However due to the fact that illus do not have direct control on where and how the products are installed, illus illumination cannot accept any liability either direct or indirect arising from the use of illus products whether or not in accordance with any advice, specification, recommendation or information provided by illus illumination or its distributors.

09092021v1