

Simple and flexible solution to design modern light lines in professional and retail spaces

LED MAGNETIC TRACK LINEAR LIGHT SERIES

PRODUCT INFORMATION

- Modern looking, neat luminaire offering comfortable, good quality lighting and can also work as a design element.
- Ideal lighting in the non-working areas of professional spaces such as offices, educational institutes, and also the welcoming areas and entrances of retail spaces.
- ILLUS LED MAGNETIC TRACK LINEAR Light gives the customer the flexibility to choose between 8 models based on their specific need with lumen package from 750 lm to 2250 lm.

BENEFITS

- Clean and uniform light.
- Multiple application use.
- Easy to install and maintain.

FEATURES

- High CRI>90.
- Efficacy up to 98 lm/w.
- Long life span 30,000 hrs.
- Operating voltage DC48V.
- Non dimmable.



AREAS OF APPLICATION



Shopping Center

*

Commercial

हाँ Educational Center


I TECHNICAL OPERATING & ELECTRICAL DATA

IP Rating	IP20
CRI	90
Body Color	Sandy White
Body Material	Aluminum
Lumen	from 750 to 2250lm/M+/-10%
Operating Voltage	DC48V
Frequency	50/60Hz
Beam Angle	30°
Mounting Type	Surface Mounted
Dimming	Non-Dimmable
Directional or Non Directional	Directional
Fixed or Adjustable	Fixed
Life Span	30000h


SPECIFICATIONS

Code No.	Model No.	Power	Lumen	Efficacy	CCT
614524	ILS8.5W30DMTL930WWW01	8.5W	750lm	88.24lm/W	3000K
614525	ILS8.5W30DMTL940NWW01	8.5W	800lm	94.12lm/W	4000K
614526	ILS14.5W30DMTL930WWW01	14.5W	1300lm	89.66lm/W	3000K
614527	ILS14.5W30DMTL940NWW01	14.5W	1370lm	94.48lm/W	4000K
614528	ILS20W30DMTL930WWW01	20W	1650lm	82.50lm/W	3000K
614529	ILS20W30DMTL940NWW01	20W	1750lm	87.50lm/W	4000K
614530	ILS23W30DMTL930WWW01	23W	2050lm	89.13lm/W	3000K
614531	ILS23W30DMTL940NWW01	23W	2250lm	97.83lm/W	4000K


DIMENSIONS

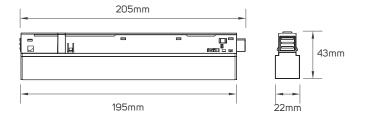


614524 - 614525

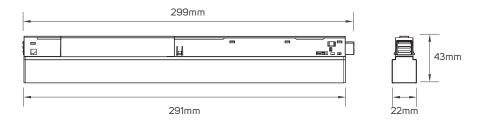

614526 - 614527

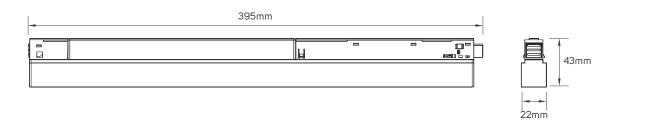


614528 - 614529

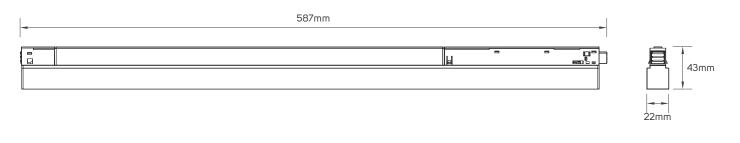


ACCESSORIES

Code No.	Model No.	Body Color	Body Material	Power
614564	ILS1M4RTLW01	sandy white	aluminum	/
614565	ILS2M4RTLW01	sandy white	aluminum	/
614566	ILS3M4RTLW01	sandy white	aluminum	/
614567	ILS1M4RTLW02	sandy white	aluminum	/
614568	ILS2M4RTLW02	sandy white	aluminum	/
614569	ILS3M4RTLW02	sandy white	aluminum	/
614570	ILS48VPSTRKW01	sandy white	plastic	150W
614571	ILSRATRKW01	sandy white	aluminum	/
614572	ILSRATRKW02	sandy white	aluminum	/
614573	ILSSMATRKW01	sandy white	aluminum	/
614574	ILSSMATRKW02	sandy white	aluminum	/
614575	ILSCITRKW01	sandy white	plastic	/
614576	ILSCLTRKW01	sandy white	plastic	/
613682	ILSPKITTRK01	silver	steel	/
613683	ILSTKITTRK01	silver	aluminum	/


ACCESSORIES DIMENSIONS

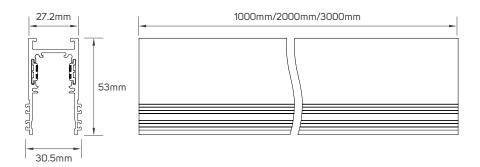



614564 - 614565 - 614566

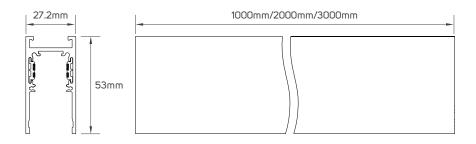


614567 - 614568 - 614569












614576




614575

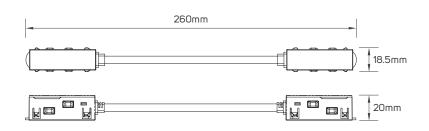


614570

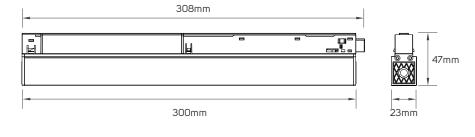

614573





614574


86mm

ACCESSORIES DIMENSIONS


53mm

86mm


ACCESSORIES DIMENSIONS







APPLICATION PICTURE

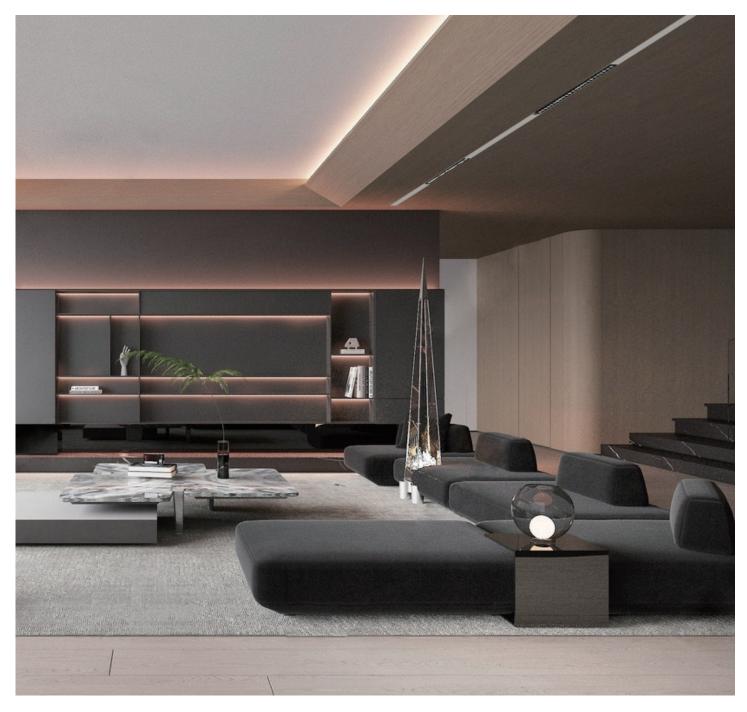

LED MAGNETIC TRACK LINEAR LIGHT SERIES

BEYOND LIGHT.. TO THE LAST DETAILS!



Carrer de la Vall de la Ballestera, 64, 46015 València, Valencia, España, Tel: +34619824456

www.illusillumination.com

1192021V.1

illus illumination reserve the right to make dimensional, design and technical alternations without prior notice. Illus illumination endeavor to ensure that any advice, recommendation or information it provides in product literature is accurate and correct. However due to the fact that illus do not have direct control on where and how the products are installed, illus illumination cannot accept any liability either direct or indirect arising from the use of illus products whether or not in accordance with any advice, specification, recommendation or information provided by illus illumination or its distributors.